


DIN 7969

- Havşabaşlı Civata
- Slotted Countersunk Head Bolts
- Senkschrauben mit Schlitz

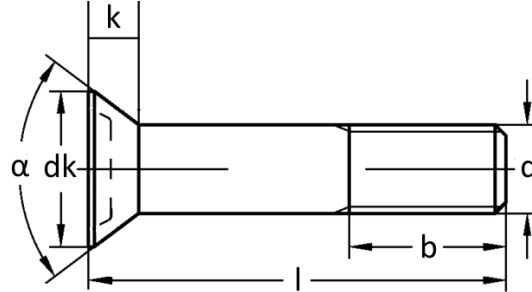

d	M 10	M 12	M 16	M 20	M 22	M 24
P (pitch)	1,5	1,75	2	2,5	2,5	3
dk	17	21	28	32	35	38
k	5,5	7	9	11,5	12	13
b	20	22	28	32	35	38
b	25	28	35	40	45	50
α	75°	75°	75°	60°	60°	60°
l	35-160	40-160	45-160	55-160	55-160	60-160